
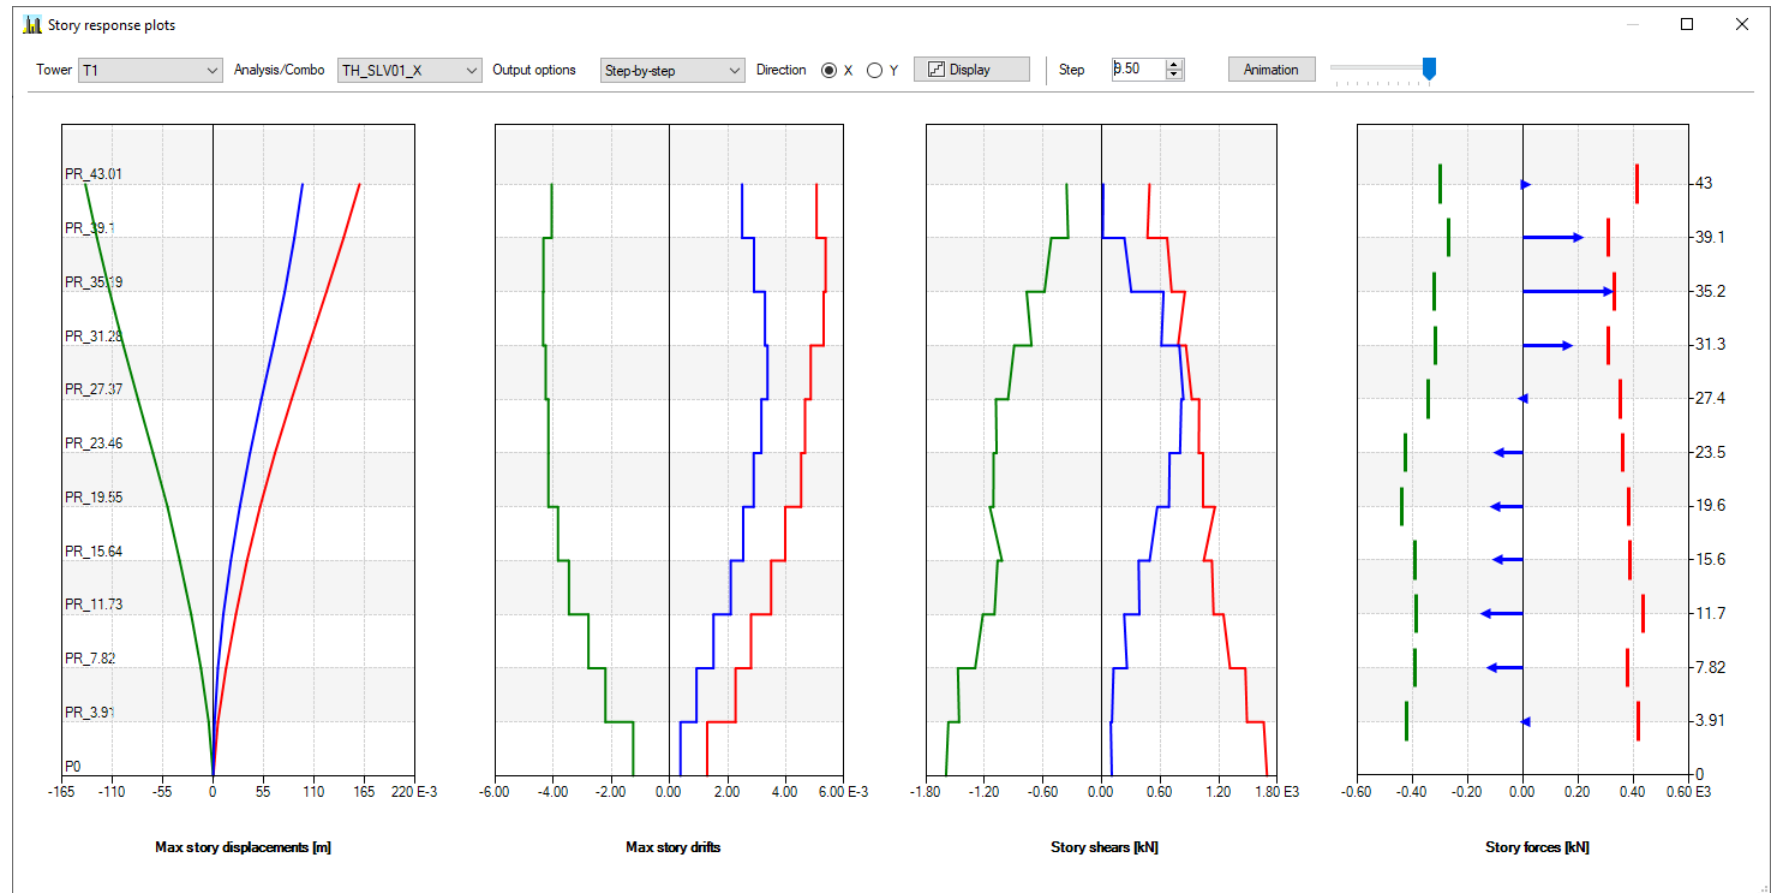


TOWERS – CARACTERIZAÇÃO SÍSMICA DE EDIFÍCIOS

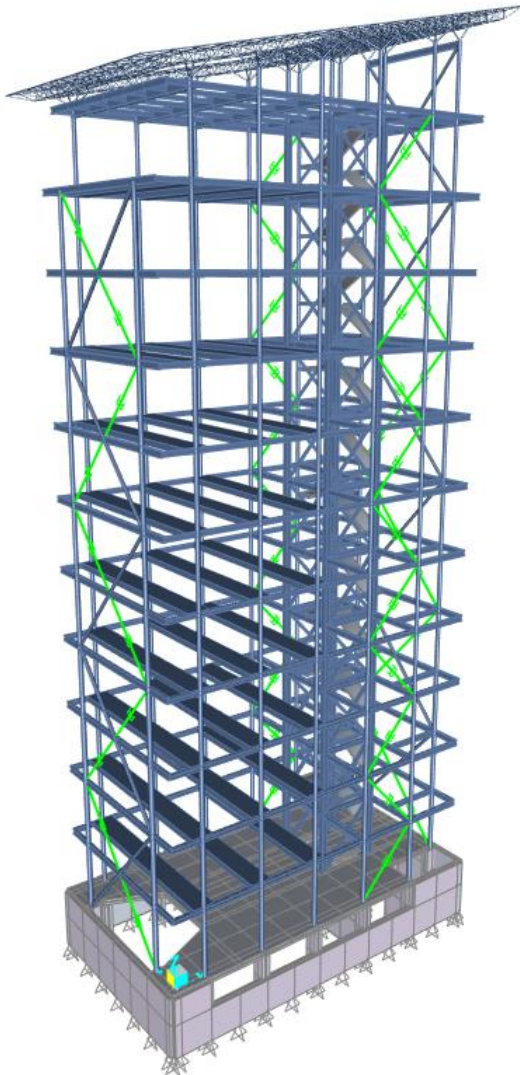


WHAT IS TOWERS?

SEISMIC ANALYSIS OF MULTISTORY BUILDINGS

TOWERS is a plugin for SAP2000 that includes specific functionalities for the analysis of multistory buildings.




After the installation has been completed, the plugin can be executed directly from the SAP2000 "Tools" menu.

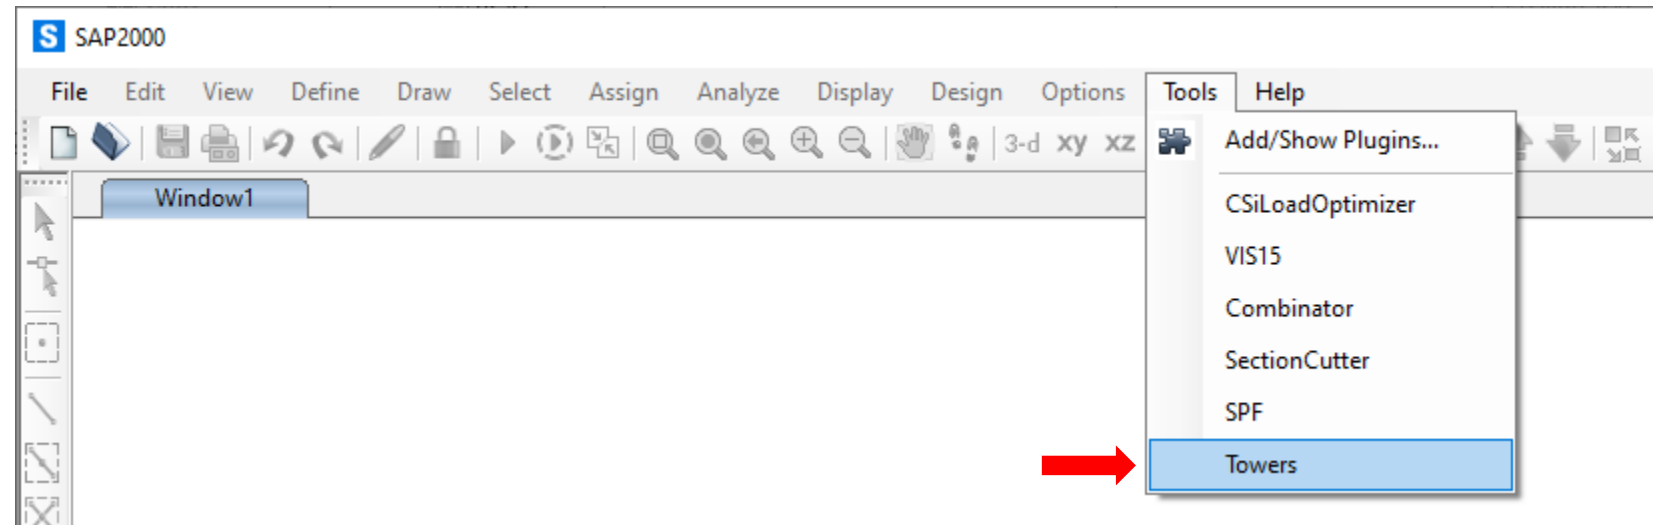

WHAT IS TOWERS?

SEISMIC ANALYSIS OF MULTISTORY BUILDINGS

One or multiple "tower" objects can readily be defined from the main window. All the towers will be saved inside .sdb file of the model and, therefore, it will not be necessary to re-define them in any subsequent session.

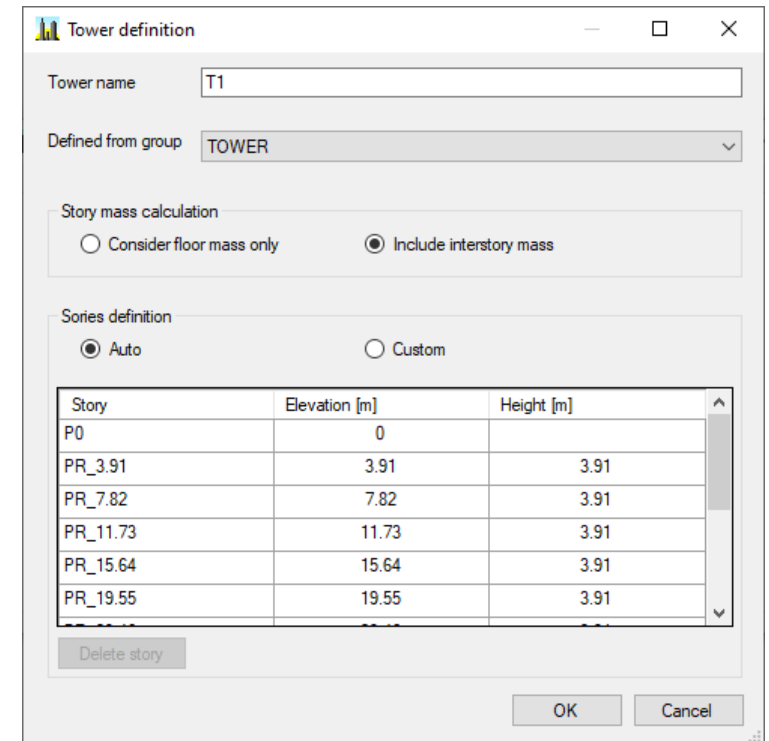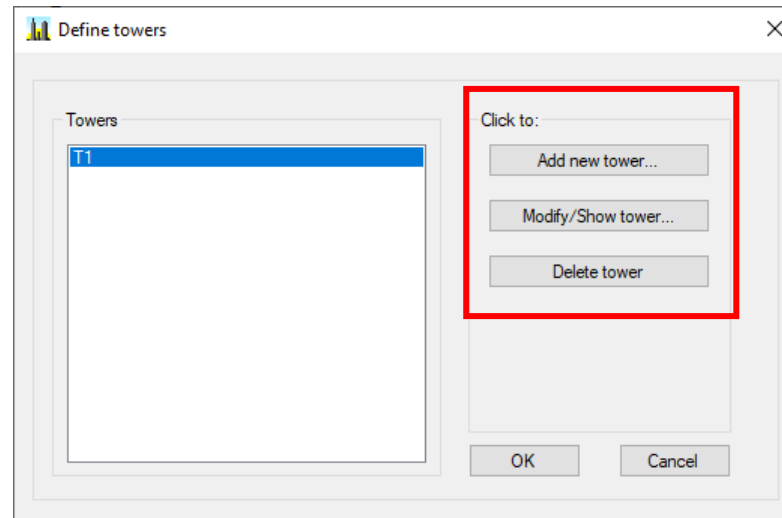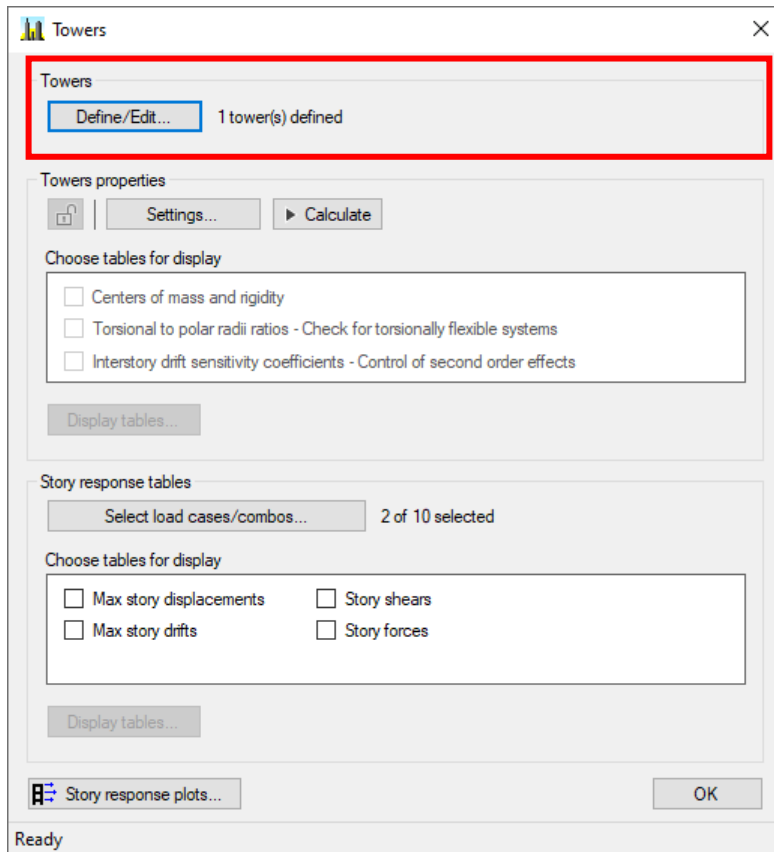


WHAT TOWERS DOES?

SEISMIC ANALYSIS OF MULTISTORY BUILDINGS

Once that one or more towers have been defined, the following operations will be made available:



- **TOWERS PROPERTIES CALCULATION** – Calculate the floors centers of mass, floors centers of rigidity, floors torsional radii, floors polar radii and drift sensitivity coefficients (used to measure the sensitivity to second order effects).
- **STORY RESPONSE TABLES** – Display the response tables in terms of maximum story displacements, maximum story drifts, story shears and story forces.
- **STORY RESPONSE PLOTS** – Display interactive diagrams of story displacements, story drifts, story shears and story forces over the height of the building.

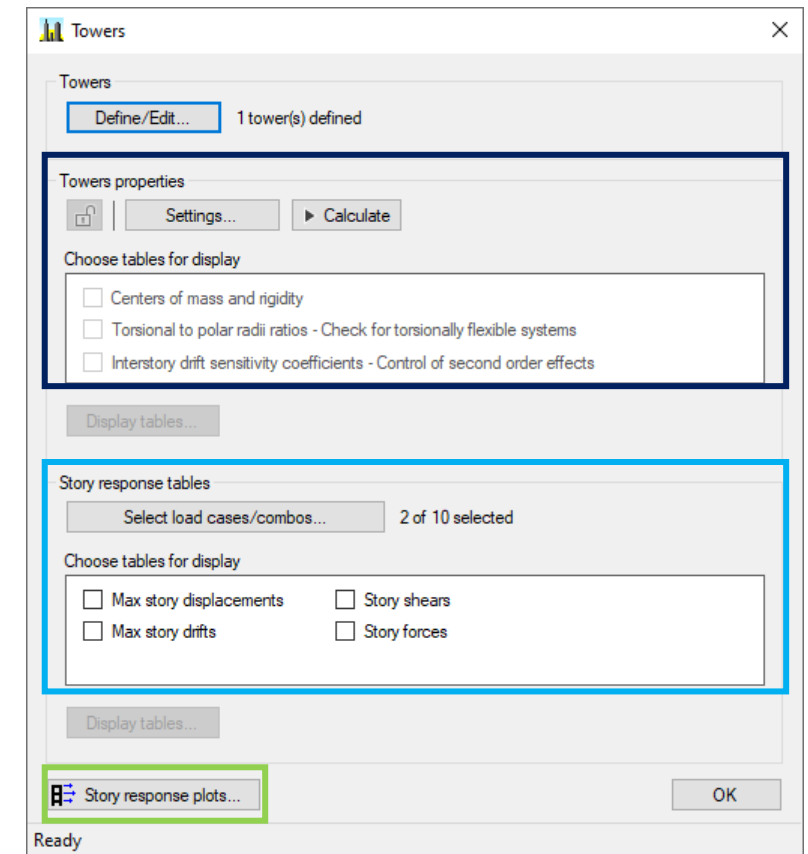

WHAT TOWERS DOES?

TOWERS PROPERTIES CALCULATION

Once that one or more towers have been defined, the following operations will be made available:

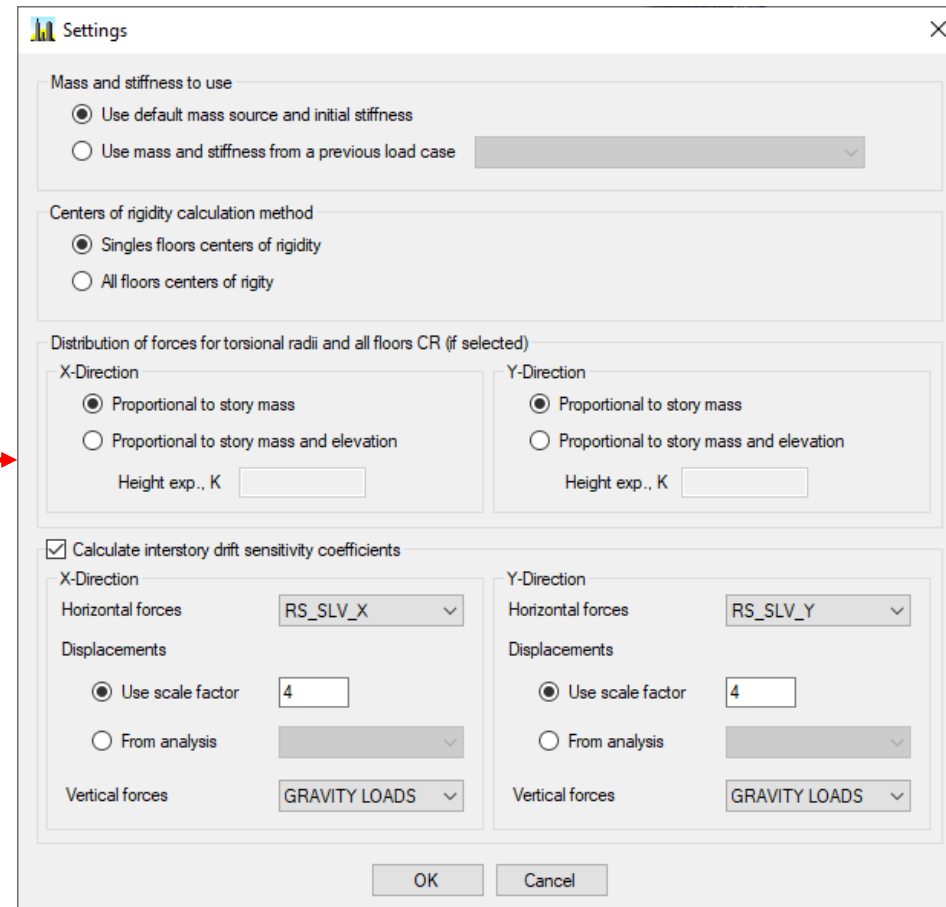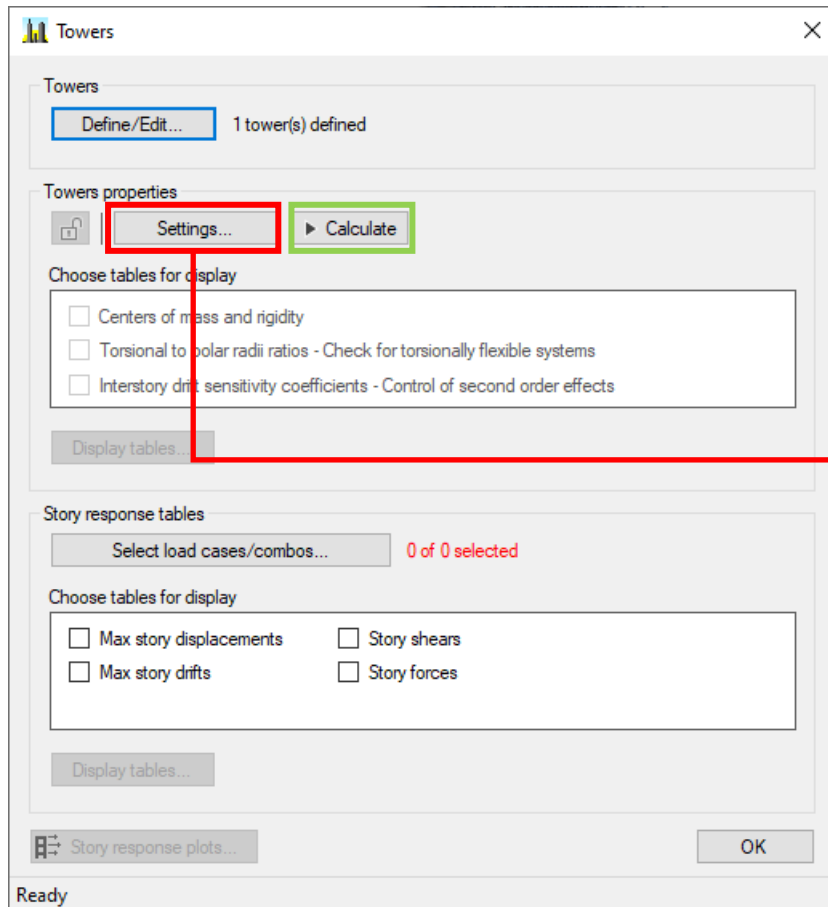

Customize the **analysis settings** and **run the calculation.**

WHAT TOWERS DOES?

TOWERS PROPERTIES CALCULATION

Output – Centers of Mass and Rigidity

Tower	Story	Elevation [m]	Bx [m]	By [m]	Mx [kNs ² /m]	My [kNs ² /m]	Mz [kNs ² /m]	Iz [kNms ²]	Xcm [m]	Ycm [m]	Xcr [m]	Ycr [m]	ex [m]	ey [m]	ex/Bx	ey/By
T1	PR_3.91	3.91	19.8	10.8	183.3	183.3	183.3	1.094e+04	8.584	5.323	10.43	5.439	1.845	0.1157	0.09319	0.01072
T1	PR_7.82	7.82	19.8	10.8	184.7	184.7	184.7	1.113e+04	8.641	5.324	9.932	5.345	1.292	0.02081	0.06523	0.001927
T1	PR_11.73	11.73	19.8	10.8	184.2	184.2	184.2	1.105e+04	8.657	5.333	10.14	5.445	1.479	0.1117	0.07467	0.01035
T1	PR_15.64	15.64	19.8	10.8	183.6	183.6	183.6	1.111e+04	8.643	5.341	9.838	5.6	1.195	0.2586	0.06037	0.02394
T1	PR_19.55	19.55	19.8	10.8	184.9	184.9	184.9	1.11e+04	8.716	5.343	10.05	5.551	1.329	0.2078	0.06714	0.01924
T1	PR_23.46	23.46	19.8	10.8	182.8	182.8	182.8	1.101e+04	8.623	5.327	9.74	5.785	1.118	0.4585	0.05645	0.04245
T1	PR_27.37	27.37	19.8	10.8	182.9	182.9	182.9	1.093e+04	8.664	5.339	9.882	5.868	1.218	0.5291	0.06152	0.04899
T1	PR_31.28	31.28	19.8	10.8	180.4	180.4	180.4	1.082e+04	8.547	5.327	9.677	5.995	1.13	0.6672	0.05709	0.06178
T1	PR_35.19	35.19	19.8	10.8	182.8	182.8	182.8	1.095e+04	8.701	5.343	9.811	5.923	1.11	0.5798	0.05606	0.05368
T1	PR_39.1	39.1	19.8	10.8	179	179	179	1.071e+04	8.563	5.323	9.647	6.04	1.084	0.7171	0.05477	0.0664
T1	PR_43.01	43.01	19.16	10.8	125.5	125.5	125.5	5811	9.711	5.304	11	5.973	1.288	0.6692	0.06721	0.06197

Story inertial
properties

Story
centers of
mass (CM)

Story
centers of
rigidity
(CR)

Static
eccentricities

WHAT TOWERS DOES?

TOWERS PROPERTIES CALCULATION

Output – Torsional to polar radii ratios

Tower	Story	Elevation [m]	X-Direction					Y-Direction				
			K [kN/m]	K θ [kNm/Rad]	r [m]	I _s [m]	(r/I _s) ²	K [kN/m]	K θ [kNm/Rad]	r [m]	I _s [m]	(r/I _s) ²
T1	PR_3.91	3.91	2.808e+05	2.865e+07	10.1	7.724	1.71	2.964e+05	2.865e+07	9.833	7.724	1.62
T1	PR_7.82	7.82	1.42e+05	2.31e+07	12.75	7.762	2.7	2.273e+05	2.31e+07	10.08	7.762	1.687
T1	PR_11.73	11.73	9.576e+04	1.632e+07	13.05	7.744	2.842	1.63e+05	1.632e+07	10.01	7.744	1.669
T1	PR_15.64	15.64	6.989e+04	1.54e+07	14.84	7.779	3.641	1.543e+05	1.54e+07	9.99	7.779	1.649
T1	PR_19.55	19.55	6.532e+04	1.03e+07	12.56	7.747	2.627	1.062e+05	1.03e+07	9.849	7.747	1.616
T1	PR_23.46	23.46	5.45e+04	1.126e+07	14.37	7.759	3.433	1.088e+05	1.126e+07	10.17	7.759	1.72
T1	PR_27.37	27.37	4.48e+04	7.327e+06	12.79	7.732	2.736	7.333e+04	7.327e+06	9.996	7.732	1.671
T1	PR_31.28	31.28	3.199e+04	7.678e+06	15.49	7.746	4.001	7.494e+04	7.678e+06	10.12	7.746	1.708
T1	PR_35.19	35.19	2.756e+04	4.247e+06	12.41	7.74	2.573	4.419e+04	4.247e+06	9.804	7.74	1.604
T1	PR_39.1	39.1	1.472e+04	4.019e+06	16.52	7.737	4.561	3.755e+04	4.019e+06	10.35	7.737	1.788
T1	PR_43.01	43.01	6623	1.337e+06	14.21	6.805	4.358	1.758e+04	1.337e+06	8.721	6.805	1.642

Equivalent story
translational and
torsional
stiffness

Story
torsional
radius

Story
polar
radius

Torsional to
polar radii
ratio

WHAT TOWERS DOES?

TOWERS PROPERTIES CALCULATION

Output – Drift sensitivity coefficients

Tower	Story	Elevation [m]	X-Direction					Y-Direction				
			P [kN]	V [kN]	d [m]	h [m]	θ	P [kN]	V [kN]	d [m]	h [m]	θ
T1	PR_3.91	3.91	2.093e+04	638.1	0.008869	3.91	0.0744	2.093e+04	707	0.01026	3.91	0.07767
T1	PR_7.82	7.82	1.894e+04	612	0.0165	3.91	0.1306	1.894e+04	659.9	0.01298	3.91	0.09529
T1	PR_11.73	11.73	1.699e+04	522.7	0.02071	3.91	0.1722	1.699e+04	615.6	0.01521	3.91	0.1074
T1	PR_15.64	15.64	1.504e+04	455.6	0.02474	3.91	0.2088	1.504e+04	556.3	0.01577	3.91	0.109
T1	PR_19.55	19.55	1.306e+04	454.8	0.02662	3.91	0.1954	1.306e+04	505.2	0.01877	3.91	0.124
T1	PR_23.46	23.46	1.11e+04	414.8	0.02824	3.91	0.1933	1.11e+04	456	0.01795	3.91	0.1118
T1	PR_27.37	27.37	9160	380.5	0.02969	3.91	0.1828	9160	418.6	0.02066	3.91	0.1156
T1	PR_31.28	31.28	7252	324.5	0.03097	3.91	0.177	7252	387.9	0.0189	3.91	0.09035
T1	PR_35.19	35.19	5287	319	0.03087	3.91	0.1309	5287	339	0.02246	3.91	0.0896
T1	PR_39.1	39.1	3386	242.5	0.03008	3.91	0.1074	3386	262.2	0.0179	3.91	0.05913
T1	PR_43.01	43.01	1465	153.8	0.02829	3.91	0.0689	1465	168.9	0.03271	3.91	0.07256

Resultant story
vertical and
shear forces

Story
drift

Story
height




$P*d/V*h$

WHAT TOWERS DOES?

STORY RESPONSE TABLES

Select the load cases/load combinations of interest and display the corresponding output tables.

Appropriate output options can be set for the different analysis types directly from the SAP2000 interface.

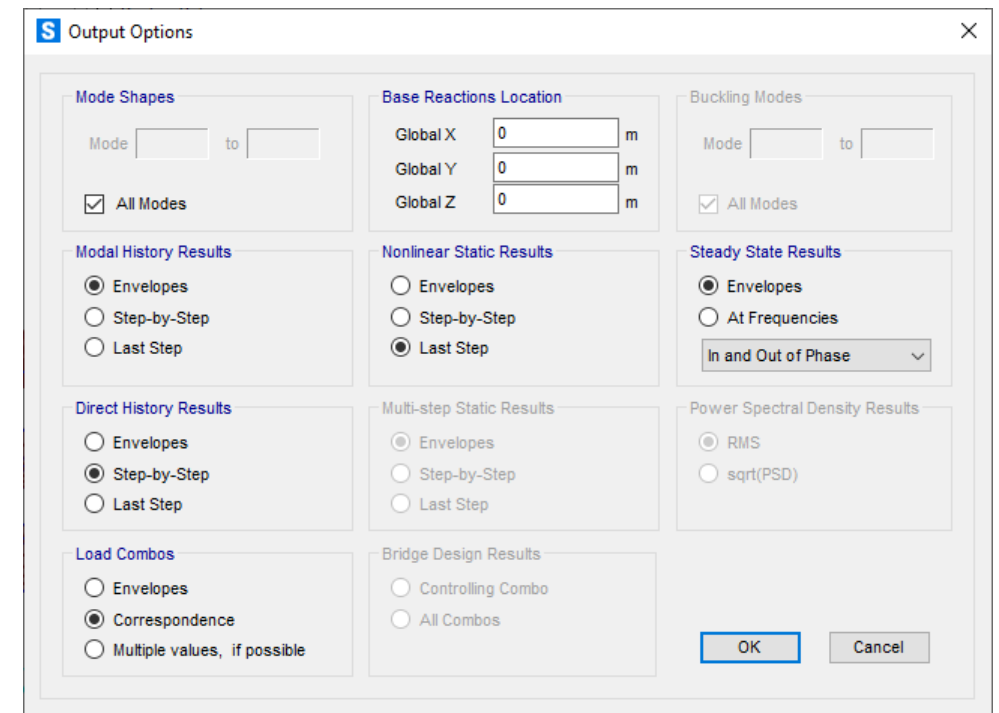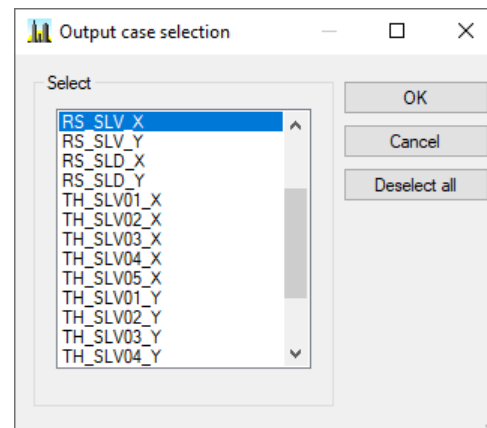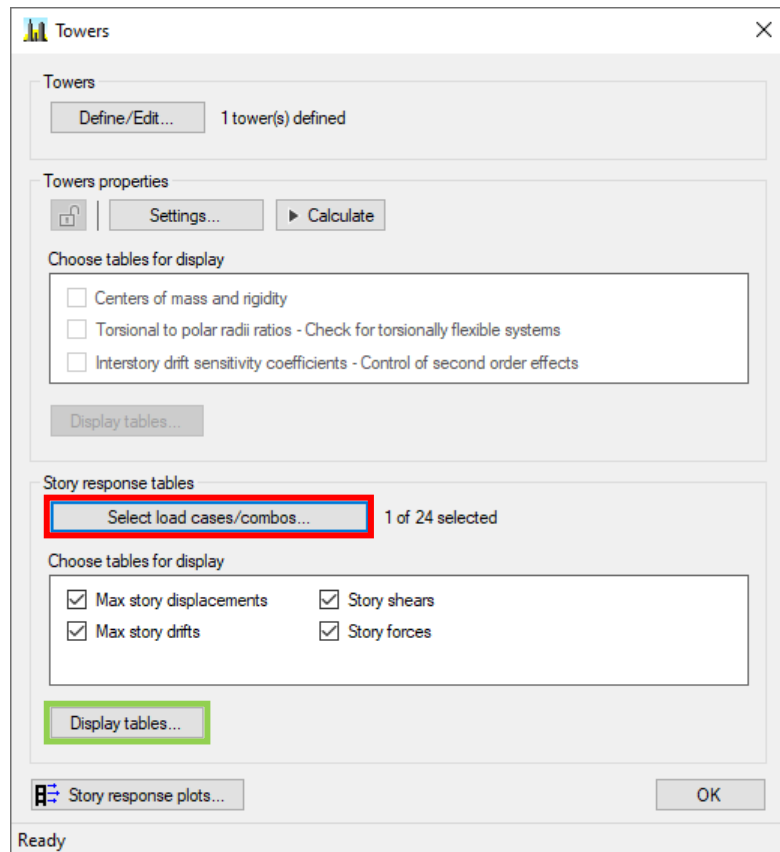

WHAT TOWERS DOES?

STORY RESPONSE TABLES

Export to Excel

Max story displacements | Max story drifts | Story shears | Story forces

Tower	Story	Elevation [m]	Analysis/Comb.	Type	Output type	X-Direction		Y-Direction	
						Ux [m]	Joint ID	Uy [m]	Joint ID
T1	P0	0	RS_SLV_X	LinRespSpec	Max	3.7e-05	73	1.2e-05	13
T1	PR_3.91	3.91	RS_SLV_X	LinRespSpec	Max	0.002412	62	0.000506	434
T1	PR_7.82	7.82	RS_SLV_X	LinRespSpec	Max	0.00668	63	0.000913	435
T1	PR_11.73	11.73	RS_SLV_X	LinRespSpec	Max	0.01212	4	0.001526	436
T1	PR_15.64	15.64	RS_SLV_X	LinRespSpec	Max	0.01858	5	0.002309	437
T1	PR_19.55	19.55	RS_SLV_X	LinRespSpec	Max	0.02529	6	0.002712	438
T1	PR_23.46	23.46	RS_SLV_X	LinRespSpec	Max	0.03249	7	0.003762	439
T1	PR_27.37	27.37	RS_SLV_X	LinRespSpec	Max	0.04006	8	0.005192	440
T1	PR_31.28	31.28	RS_SLV_X	LinRespSpec	Max	0.04756	9	0.005893	441
T1	PR_35.19	35.19	RS_SLV_X	LinRespSpec	Max	0.05504	10	0.006754	442
T1	PR_39.1	39.1	RS_SLV_X	LinRespSpec	Max	0.06236	11	0.007747	443
T1	PR_43.01	43.01	RS_SLV_X	LinRespSpec	Max	0.06939	84	0.0087	444

Maximum story displacements table available for user defined analysis/combos. For each story and each analysis, the ID of the corresponding joint is reported.

Maximum story drift table available for user defined analysis. For each story and each analysis/combo, the ID of the corresponding object is reported.

Export to Excel

Max story displacements | Max story drifts | Story shears | Story forces

Tower	Story	Elevation [m]	Analysis/Comb.	Type	Output type	X-Direction		Y-Direction	
						dUx	Object ID	dUy	Object ID
T1	PR_3.91	3.91	RS_SLV_X	LinRespSpec	Max	0.000611	122	0.00013	408
T1	PR_7.82	7.82	RS_SLV_X	LinRespSpec	Max	0.001095	123	0.000118	409
T1	PR_11.73	11.73	RS_SLV_X	LinRespSpec	Max	0.001431	135	0.000289	410
T1	PR_15.64	15.64	RS_SLV_X	LinRespSpec	Max	0.001681	136	0.000211	411
T1	PR_19.55	19.55	RS_SLV_X	LinRespSpec	Max	0.00188	546	0.000208	412
T1	PR_23.46	23.46	RS_SLV_X	LinRespSpec	Max	0.002097	547	0.000294	413
T1	PR_27.37	27.37	RS_SLV_X	LinRespSpec	Max	0.00205	139	0.000383	414
T1	PR_31.28	31.28	RS_SLV_X	LinRespSpec	Max	0.002061	140	0.000187	415
T1	PR_35.19	35.19	RS_SLV_X	LinRespSpec	Max	0.002415	554	0.000231	416
T1	PR_39.1	39.1	RS_SLV_X	LinRespSpec	Max	0.002488	555	0.000262	147
T1	PR_43.01	43.01	RS_SLV_X	LinRespSpec	Max	0.002371	383	0.000246	383

WHAT TOWERS DOES?

STORY RESPONSE TABLES

Story results

Export to Excel

Max story displacements | Max story drifts | Story shears | Story forces

Tower	Story	Elevation	Location	Analysis/Comb.	Type	Output type	FX	FY	FZ
		[m]					[kN]	[kN]	[kN]
T1	P0	0	ABOVE	RS_SLV_X	LinRespSpec	Max	648.2	15.76	21.66
T1	PR_3.91	3.91	BELOW	RS_SLV_X	LinRespSpec	Max	638.1	16.18	22.42
T1	PR_3.91	3.91	ABOVE	RS_SLV_X	LinRespSpec	Max	607.8	15.78	22.08
T1	PR_7.82	7.82	BELOW	RS_SLV_X	LinRespSpec	Max	612	15	19.74
T1	PR_7.82	7.82	ABOVE	RS_SLV_X	LinRespSpec	Max	563.8	26.76	22.67
T1	PR_11.73	11.73	BELOW	RS_SLV_X	LinRespSpec	Max	522.7	13.26	20.36
T1	PR_11.73	11.73	ABOVE	RS_SLV_X	LinRespSpec	Max	470.3	12.17	35.93
T1	PR_15.64	15.64	BELOW	RS_SLV_X	LinRespSpec	Max	455.6	15.27	20.96
T1	PR_15.64	15.64	ABOVE	RS_SLV_X	LinRespSpec	Max	410	14.53	40.9
T1	PR_19.55	19.55	BELOW	RS_SLV_X	LinRespSpec	Max	454.8	11.17	16.74
T1	PR_19.55	19.55	ABOVE	RS_SLV_X	LinRespSpec	Max	417	9.855	48.51
T1	PR_23.46	23.46	BELOW	RS_SLV_X	LinRespSpec	Max	414.8	9.665	14.75
T1	PR_23.46	23.46	ABOVE	RS_SLV_X	LinRespSpec	Max	382.5	34.57	28.54
T1	PR_27.37	27.37	BELOW	RS_SLV_X	LinRespSpec	Max	380.5	9.179	12.69
T1	PR_27.37	27.37	ABOVE	RS_SLV_X	LinRespSpec	Max	349.6	58.35	29.95
T1	PR_31.28	31.28	BELOW	RS_SLV_X	LinRespSpec	Max	324.5	24.17	20.57
T1	PR_31.28	31.28	ABOVE	RS_SLV_X	LinRespSpec	Max	296.1	24.77	18.96
T1	PR_35.19	35.19	BELOW	RS_SLV_X	LinRespSpec	Max	319	9.964	7.959
T1	PR_35.19	35.19	ABOVE	RS_SLV_X	LinRespSpec	Max	270.5	8.691	25.37
T1	PR_39.1	39.1	BELOW	RS_SLV_X	LinRespSpec	Max	242.5	24.35	17.41
T1	PR_39.1	39.1	ABOVE	RS_SLV_X	LinRespSpec	Max	152.1	26.44	20.42
T1	PR_43.01	43.01	BELOW	RS_SLV_X	LinRespSpec	Max	153.8	8.023	6.426

Resultant story shears (FX, FY, FZ) are available for user defined analysis/combos.

Resultant story forces (FX, FY, FZ) are available for user defined analysis/combos.

Story results

Export to Excel


Max story displacements | Max story drifts | Story shears | Story forces

Tower	Story	Elevation	Analysis/Comb.	Type	Output type	FX	FY	FZ
		[m]				[kN]	[kN]	[kN]
T1	PR_3.91	3.91	RS_SLV_X	LinRespSpec	Max	117.6	8.17	12.57
T1	PR_7.82	7.82	RS_SLV_X	LinRespSpec	Max	124.7	21.25	12.5
T1	PR_11.73	11.73	RS_SLV_X	LinRespSpec	Max	139.7	7.117	25.16
T1	PR_15.64	15.64	RS_SLV_X	LinRespSpec	Max	134.4	6.831	27.82
T1	PR_19.55	19.55	RS_SLV_X	LinRespSpec	Max	131.8	6.849	47.43
T1	PR_23.46	23.46	RS_SLV_X	LinRespSpec	Max	123	30.03	26.94
T1	PR_27.37	27.37	RS_SLV_X	LinRespSpec	Max	123.3	54.18	28.71
T1	PR_31.28	31.28	RS_SLV_X	LinRespSpec	Max	113.5	5.107	6.033
T1	PR_35.19	35.19	RS_SLV_X	LinRespSpec	Max	105	5.32	25.08
T1	PR_39.1	39.1	RS_SLV_X	LinRespSpec	Max	110.5	6.366	5.456
T1	PR_43.01	43.01	RS_SLV_X	LinRespSpec	Max	128.3	5.187	4.571

WHAT TOWERS DOES?


STORY RESPONSE PLOTS

Multi-step animated response plots are available for each analysis/load combination to provide an immediate feedback of the structural response.

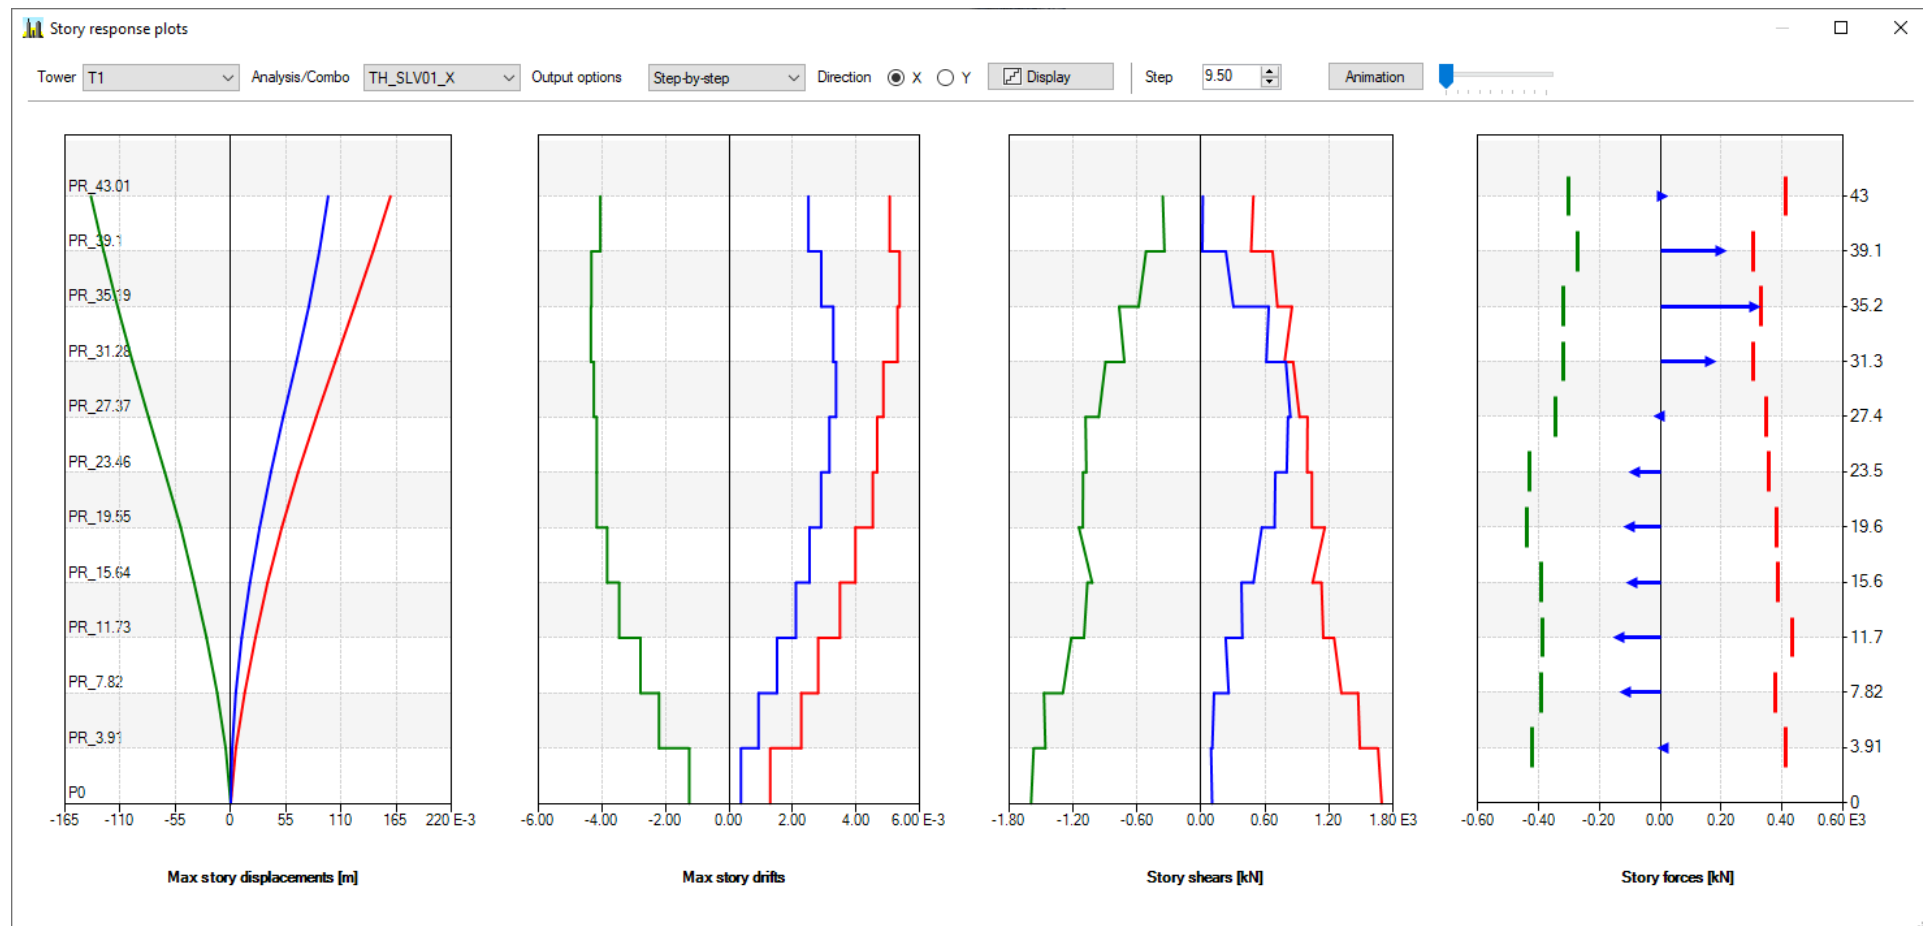

WHAT TOWERS DOES?

EUROCODE 8 - BEHAVIOUR FACTOR - TORSIONALLY FLEXIBLE SYSTEM?

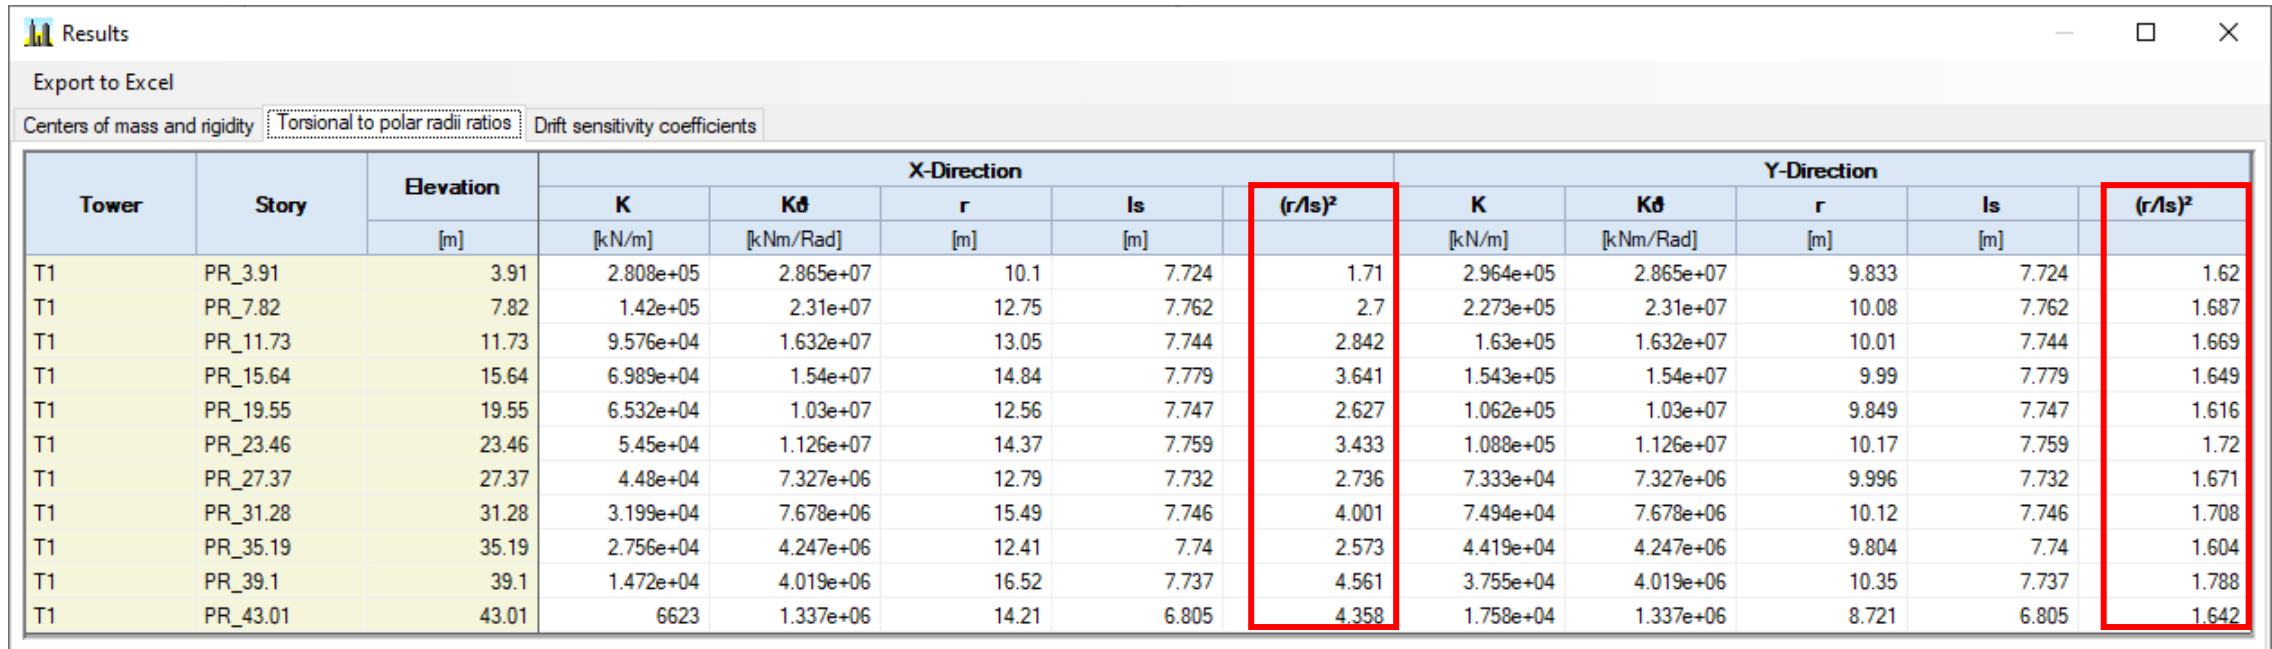

Tower	Story	Elevation [m]	X-Direction					Y-Direction				
			K [kN/m]	Kθ [kNm/Rad]	r [m]	Is [m]	(r/Is)²	K [kN/m]	Kθ [kNm/Rad]	r [m]	Is [m]	(r/Is)²
T1	PR_3.91	3.91	2.808e+05	2.865e+07	10.1	7.724	1.71	2.964e+05	2.865e+07	9.833	7.724	1.62
T1	PR_7.82	7.82	1.42e+05	2.31e+07	12.75	7.762	2.7	2.273e+05	2.31e+07	10.08	7.762	1.687
T1	PR_11.73	11.73	9.576e+04	1.632e+07	13.05	7.744	2.842	1.63e+05	1.632e+07	10.01	7.744	1.669
T1	PR_15.64	15.64	6.989e+04	1.54e+07	14.84	7.779	3.641	1.543e+05	1.54e+07	9.99	7.779	1.649
T1	PR_19.55	19.55	6.532e+04	1.03e+07	12.56	7.747	2.627	1.062e+05	1.03e+07	9.849	7.747	1.616
T1	PR_23.46	23.46	5.45e+04	1.126e+07	14.37	7.759	3.433	1.088e+05	1.126e+07	10.17	7.759	1.72
T1	PR_27.37	27.37	4.48e+04	7.327e+06	12.79	7.732	2.736	7.333e+04	7.327e+06	9.996	7.732	1.671
T1	PR_31.28	31.28	3.199e+04	7.678e+06	15.49	7.746	4.001	7.494e+04	7.678e+06	10.12	7.746	1.708
T1	PR_35.19	35.19	2.756e+04	4.247e+06	12.41	7.74	2.573	4.419e+04	4.247e+06	9.804	7.74	1.604
T1	PR_39.1	39.1	1.472e+04	4.019e+06	16.52	7.737	4.561	3.755e+04	4.019e+06	10.35	7.737	1.788
T1	PR_43.01	43.01	6623	1.337e+06	14.21	6.805	4.358	1.758e+04	1.337e+06	8.721	6.805	1.642

(4)P Os primeiros quatro tipos de sistemas (ou seja, porticado, misto e de paredes de ambos os tipos) devem possuir uma rigidez de torção mínima que satisfaça a expressão (4.1b) nas duas direcções horizontais.

$$r_x \geq l_s \quad (4.1b)$$

em que:

r_x raiz quadrada da relação entre a rigidez de torção e a rigidez lateral na direcção y (“raio de torção”);

l_s raio de giração da massa do piso em planta (raiz quadrada da relação entre (a) o momento polar de inércia da massa do piso em planta em relação ao centro de gravidade do piso e (b) a massa do piso).

WHAT TOWERS DOES?

EUROCODE 8 - BEHAVIOUR FACTOR – REGULAR IN PLAN BUILDING?

Tower	Story	Elevation [m]	X-Direction				Y-Direction					
			K [kN/m]	K δ [kNm/Rad]	r [m]	l _s [m]	(r/l _s) ²	K [kN/m]	K δ [kNm/Rad]	r [m]	l _s [m]	(r/l _s) ²
T1	PR_3.91	3.91	2.808e+05	2.865e+07	10.1	7.724	1.71	2.964e+05	2.865e+07	9.833	7.724	1.62
T1	PR_7.82	7.82	1.42e+05	2.31e+07	12.75	7.762	2.7	2.273e+05	2.31e+07	10.08	7.762	1.687
T1	PR_11.73	11.73	9.576e+04	1.632e+07	13.05	7.744	2.842	1.63e+05	1.632e+07	10.01	7.744	1.669
T1	PR_15.64	15.64	6.989e+04	1.54e+07	14.84	7.779	3.641	1.543e+05	1.54e+07	9.99	7.779	1.649
T1	PR_19.55	19.55	6.532e+04	1.03e+07	12.56	7.747	2.627	1.062e+05	1.03e+07	9.849	7.747	1.616
T1	PR_23.46	23.46	5.45e+04	1.126e+07	14.37	7.759	3.433	1.088e+05	1.126e+07	10.17	7.759	1.72
T1	PR_27.37	27.37	4.48e+04	7.327e+06	12.79	7.732	2.736	7.333e+04	7.327e+06	9.996	7.732	1.671
T1	PR_31.28	31.28	3.199e+04	7.678e+06	15.49	7.746	4.001	7.494e+04	7.678e+06	10.12	7.746	1.708
T1	PR_35.19	35.19	2.756e+04	4.247e+06	12.41	7.74	2.573	4.419e+04	4.247e+06	9.804	7.74	1.604
T1	PR_39.1	39.1	1.472e+04	4.019e+06	16.52	7.737	4.561	3.755e+04	4.019e+06	10.35	7.737	1.788
T1	PR_43.01	43.01	6623	1.337e+06	14.21	6.805	4.358	1.758e+04	1.337e+06	8.721	6.805	1.642

cm [m]	X _{cr} [m]	Y _{cr} [m]	e _x [m]	e _y [m]	e _x /B _x	e _y /B _y
5.323	10.43	5.439	1.845	0.1157	0.09319	0.01072
5.324	9.932	5.345	1.292	0.02081	0.06523	0.001927
5.333	10.14	5.445	1.479	0.1117	0.07467	0.01035
5.341	9.838	5.6	1.195	0.2586	0.06037	0.02394
5.343	10.05	5.551	1.329	0.2078	0.06714	0.01924
5.327	9.74	5.785	1.118	0.4585	0.05645	0.04245
5.339	9.882	5.868	1.218	0.5291	0.06152	0.04899
5.327	9.677	5.995	1.13	0.6672	0.05709	0.06178
5.343	9.811	5.923	1.11	0.5798	0.05606	0.05368
5.323	9.647	6.04	1.084	0.7171	0.05477	0.0664
5.304	11	5.973	1.288	0.6692	0.06721	0.06197

(6) A cada nível e para cada direcção de cálculo x e y , a excentricidade estrutural e_o e o raio de torção r devem verificar as duas condições seguintes, expressas para a direcção de cálculo y :

$$e_{ox} \leq 0,30 \cdot r_x \quad (4.1a)$$

$$r_x \geq l_s \quad (4.1b)$$

em que:

e_{ox} distância entre o centro de rigidez e o centro de gravidade, medida segundo a direcção x , perpendicular à direcção de cálculo considerada;

r_x raiz quadrada da relação entre a rigidez de torção e a rigidez lateral na direcção y (“raio de torção”);

l_s raio de giração da massa do piso em planta (raiz quadrada da relação entre (a) o momento polar de inércia da massa do piso em planta em relação ao centro de gravidade do piso e (b) a massa do piso).

WHAT TOWERS DOES?

EUROCODE 8 - BEHAVIOUR FACTOR – REGULAR IN ELEVATION BUILDING?

Results

Export to Excel

Centers of mass and rigidity | Torsional to polar radii ratios | Drift sensitivity coefficients

Tower	Story	Elevation [m]	Bx [m]	By [m]	Mx	My	Mz [kNs ² /m]	Iz [kNms ²]	Xcm [m]	Ycm [m]	Xcr [m]	Ycr [m]	ex [m]	ey [m]	ex/Bx	ey/By
					[kNs ² /m]	[kNs ² /m]										
T1	PR_3.91	3.91	19.8	10.8	183.3	183.3	183.3	1.094e+04	8.584	5.323	10.43	5.439	1.845	0.1157	0.09319	0.01072
T1	PR_7.82	7.82	19.8	10.8	184.7	184.7	184.7	1.113e+04	8.641	5.324	9.932	5.345	1.292	0.02081	0.06523	0.001927
T1	PR_11.73	11.73	19.8	10.8	184.2	184.2	184.2	1.105e+04	8.657	5.333	10.14	5.445	1.479	0.1117	0.07467	0.01035
T1	PR_15.64	15.64	19.8	10.8	183.6	183.6	183.6	1.111e+04	8.643	5.341	9.838	5.6	1.195	0.2586	0.06037	0.02394
T1	PR_19.55	19.55	19.8	10.8	184.9	184.9	184.9	1.11e+04	8.716	5.343	10.05	5.551	1.329	0.2078	0.06714	0.01924
T1	PR_23.46	23.46	19.8	10.8	182.8	182.8	182.8	1.101e+04	8.623	5.327	9.74	5.785	1.118	0.4585	0.05645	0.04245
T1	PR_27.37	27.37	19.8	10.8	182.9	182.9	182.9	1.093e+04	8.664	5.339	9.882	5.868	1.218	0.5291	0.06152	0.04899
T1	PR_31.28	31.28	19.8	10.8	180.4	180.4	180.4	1.082e+04	8.547	5.327	9.677	5.995	1.13	0.6672	0.05709	0.06178
T1	PR_35.19	35.19	19.8	10.8	182.8	182.8	182.8	1.095e+04	8.701	5.343	9.811	5.923	1.11	0.5798	0.05606	0.05368
T1	PR_39.1	39.1	19.8	10.8	179	179	179	1.071e+04	8.563	5.323	9.647	6.04	1.084	0.7171	0.05477	0.0664
T1	PR_43.01	43.01	19.16	10.8	125.5	125.5	125.5	5811	9.711	5.304	11	5.973	1.288	0.6692	0.06721	0.06197

Results

Export to Excel


Centers of mass and rigidity | Torsional to polar radii ratios | Drift sensitivity coefficients

Tower	Story	Elevation [m]	X-Direction					Y-Direction				
			K [kN/m]	K θ [kNm/Rad]	r [m]	I _s [m]	(r/I _s) ²	K [kN/m]	K θ [kNm/Rad]	r [m]	I _s [m]	(r/I _s) ²
T1	PR_3.91	3.91	2.808e+05	2.865e+07	10.1	7.724	1.71	2.964e+05	2.865e+07	9.833	7.724	1.62
T1	PR_7.82	7.82	1.42e+05	2.31e+07	12.75	7.762	2.7	2.273e+05	2.31e+07	10.08	7.762	1.687
T1	PR_11.73	11.73	9.576e+04	1.632e+07	13.05	7.744	2.842	1.63e+05	1.632e+07	10.01	7.744	1.669
T1	PR_15.64	15.64	6.989e+04	1.54e+07	14.84	7.779	3.641	1.543e+05	1.54e+07	9.99	7.779	1.649
T1	PR_19.55	19.55	6.532e+04	1.03e+07	12.56	7.747	2.627	1.062e+05	1.03e+07	9.849	7.747	1.616
T1	PR_23.46	23.46	5.45e+04	1.126e+07	14.37	7.759	3.433	1.088e+05	1.126e+07	10.17	7.759	1.72
T1	PR_27.37	27.37	4.48e+04	7.327e+06	12.79	7.732	2.736	7.333e+04	7.327e+06	9.996	7.732	1.671
T1	PR_31.28	31.28	3.199e+04	7.678e+06	15.49	7.746	4.001	7.494e+04	7.678e+06	10.12	7.746	1.708
T1	PR_35.19	35.19	2.756e+04	4.247e+06	12.41	7.74	2.573	4.419e+04	4.247e+06	9.804	7.74	1.604
T1	PR_39.1	39.1	1.472e+04	4.019e+06	16.52	7.737	4.561	3.755e+04	4.019e+06	10.35	7.737	1.788
T1	PR_43.01	43.01	6623	1.337e+06	14.21	6.805	4.358	1.758e+04	1.337e+06	8.721	6.805	1.642

(3) A rigidez lateral e a massa de cada piso permanecem constantes ou apresentam uma redução gradual, sem alterações bruscas, desde a base até ao topo do edificio considerado.

WHAT TOWERS DOES?

EUROCODE 8 - BEHAVIOUR FACTOR – INVERTED PENDULUM SYSTEM?

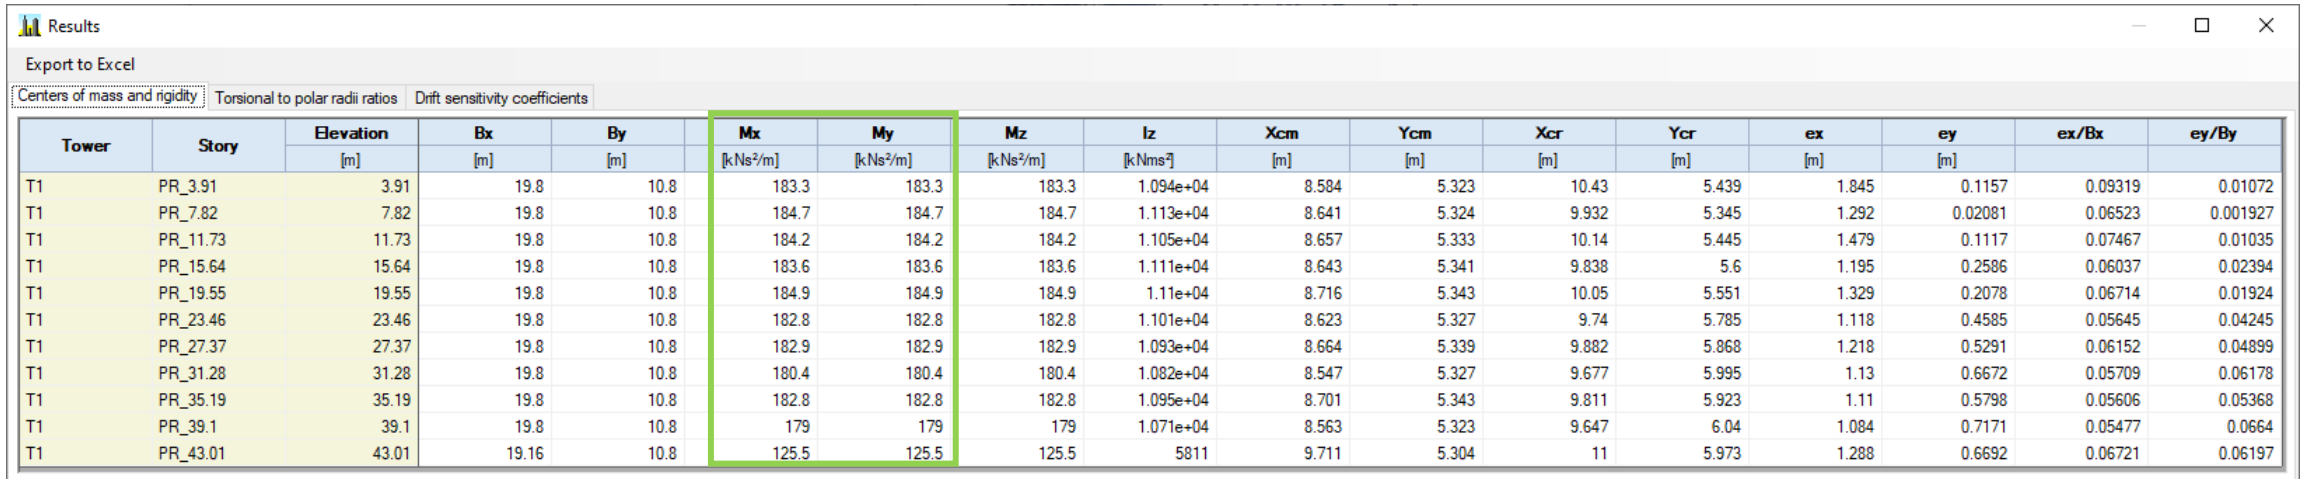

Results

Export to Excel

Centers of mass and rigidity | Torsional to polar radii ratios | Drift sensitivity coefficients

Tower	Story	Elevation [m]	Bx [m]	By [m]	Mx [kNs ² /m]	My [kNs ² /m]	Mz [kNs ² /m]	Iz [kNms ²]	Xcm [m]	Ycm [m]	Xcr [m]	Ycr [m]	ex [m]	ey [m]	ex/Bx	ey/By
T1	PR_3.91	3.91	19.8	10.8	183.3	183.3	183.3	1.094e+04	8.584	5.323	10.43	5.439	1.845	0.1157	0.09319	0.01072
T1	PR_7.82	7.82	19.8	10.8	184.7	184.7	184.7	1.113e+04	8.641	5.324	9.932	5.345	1.292	0.02081	0.06523	0.001927
T1	PR_11.73	11.73	19.8	10.8	184.2	184.2	184.2	1.105e+04	8.657	5.333	10.14	5.445	1.479	0.1117	0.07467	0.01035
T1	PR_15.64	15.64	19.8	10.8	183.6	183.6	183.6	1.111e+04	8.643	5.341	9.838	5.6	1.195	0.2586	0.06037	0.02394
T1	PR_19.55	19.55	19.8	10.8	184.9	184.9	184.9	1.11e+04	8.716	5.343	10.05	5.551	1.329	0.2078	0.06714	0.01924
T1	PR_23.46	23.46	19.8	10.8	182.8	182.8	182.8	1.101e+04	8.623	5.327	9.74	5.785	1.118	0.4585	0.05645	0.04245
T1	PR_27.37	27.37	19.8	10.8	182.9	182.9	182.9	1.093e+04	8.664	5.339	9.882	5.868	1.218	0.5291	0.06152	0.04899
T1	PR_31.28	31.28	19.8	10.8	180.4	180.4	180.4	1.082e+04	8.547	5.327	9.677	5.995	1.13	0.6672	0.05709	0.06178
T1	PR_35.19	35.19	19.8	10.8	182.8	182.8	182.8	1.095e+04	8.701	5.343	9.811	5.923	1.11	0.5798	0.05606	0.05368
T1	PR_39.1	39.1	19.8	10.8	179	179	179	1.071e+04	8.563	5.323	9.647	6.04	1.084	0.7171	0.05477	0.0664
T1	PR_43.01	43.01	19.16	10.8	125.5	125.5	125.5	5811	9.711	5.304	11	5.973	1.288	0.6692	0.06721	0.06197

sistema de pêndulo invertido

Sistema no qual 50 % ou mais da massa se localiza no terço superior da altura da estrutura, ou no qual a principal dissipação de energia tem lugar na base de um único elemento do edifício.

WHAT TOWERS DOES?

EUROCODE 8 - INTERSTOREY DRIFT SENSITIVITY COEFFICIENT

Results

Export to Excel

Centers of mass and rigidity | Torsional to polar radii ratios | **Drift sensitivity coefficients**

Tower	Story	Elevation [m]	X-Direction					Y-Direction				
			P [kN]	V [kN]	d [m]	h [m]	θ	P [kN]	V [kN]	d [m]	h [m]	θ
T1	PR_3.91	3.91	2.093e+04	638.1	0.008869	3.91	0.0744	2.093e+04	707	0.01026	3.91	0.07767
T1	PR_7.82	7.82	1.894e+04	612	0.0165	3.91	0.1306	1.894e+04	659.9	0.01298	3.91	0.09529
T1	PR_11.73	11.73	1.699e+04	522.7	0.02071	3.91	0.1722	1.699e+04	615.6	0.01521	3.91	0.1074
						3.91	0.2088	1.504e+04	556.3	0.01577	3.91	0.109
						3.91	0.1954	1.306e+04	505.2	0.01877	3.91	0.124
						3.91	0.1933	1.11e+04	456	0.01795	3.91	0.1118
						3.91	0.1828	9160	418.6	0.02066	3.91	0.1156
						3.91	0.177	7252	387.9	0.0189	3.91	0.09035
						3.91	0.1309	5287	339	0.02246	3.91	0.0896
						3.91	0.1074	3386	262.2	0.0179	3.91	0.05913
						3.91	0.0689	1465	168.9	0.03271	3.91	0.07256

(2) Não é necessário considerar os efeitos de segunda ordem (efeitos P- Δ) se a seguinte condição for satisfeita em todos os pisos:

$$\theta = \frac{P_{\text{tot}} \cdot d_r}{V_{\text{tot}} \cdot h} \leq 0,10 \quad (4.28)$$

em que:

θ coeficiente de sensibilidade ao deslocamento relativo entre pisos;

P_{tot} carga gravítica total devida a todos os pisos acima do piso considerado, incluindo este, na situação de projecto sísmica;

d_r valor de cálculo do deslocamento relativo entre pisos, avaliado como a diferença entre os deslocamentos laterais médios d_s no topo e na base do piso considerado e calculado de acordo com 4.3.4;

V_{tot} força de corte sísmica total no piso considerado;

h altura entre pisos.

(3) Se $0,1 < \theta \leq 0,2$, os efeitos de segunda ordem poderão ser avaliados de modo aproximado multiplicando os esforços sísmicos por um factor igual a $1/(1 - \theta)$.

(4) O valor do coeficiente θ não deve ser superior a 0,3.

WHAT TOWERS DOES?

EUROCODE 8 - DAMAGE LIMITATION – LIMITATION OF INTERSTOREY DRIFT

Tower	Story	Elevation [m]	Analysis/Comb.	Type	Output type	X-Direction		Y-Direction	
						dUx	Object ID	dUy	Object ID
T1	PR_3.91	3.91	RS_SLV_X	LinRespSpec	Max	0.000611	122	0.00013	408
T1	PR_7.82	7.82	RS_SLV_X	LinRespSpec	Max	0.001095	123	0.000118	409
T1	PR_11.73	11.73	RS_SLV_X	LinRespSpec	Max	0.001431	135	0.000289	410
T1	PR_15.64	15.64	RS_SLV_X	LinRespSpec	Max	0.001681	136	0.000211	411
T1	PR_19.55	19.55	RS_SLV_X	LinRespSpec	Max	0.00188	546	0.000208	412
						0.002097	547	0.000294	413
						0.00205	139	0.000383	414
						0.002061	140	0.000187	415
						0.002415	554	0.000231	416
						0.002488	555	0.000262	147
						0.002371	383	0.000246	383

a) para os edifícios com elementos não estruturais constituídos por materiais frágeis fixos à estrutura:

$$d_r v \leq 0,005 h \quad (4.31)$$

b) para os edifícios com elementos não estruturais dúcteis:

$$d_r v \leq 0,0075 h \quad (4.32)$$

c) para os edifícios com elementos não estruturais fixos de forma a não interferir com as deformações estruturais ou sem elementos não estruturais:

$$d_r v \leq 0,010 h \quad (4.33)$$

em que:

d_r valor de cálculo do deslocamento entre pisos definido em 4.4.2.2(2);

h altura entre pisos;

v coeficiente de redução que tem em conta o mais baixo período de retorno da acção sísmica associada ao requisito de limitação de danos.